
LARGE FORMAT PRINTER SURECOLOR™ SC-F6330/F7270





Sleeker, faster, higher performance. Epson SureColor F-Series printers include some of the latest advancements in printing technology to deliver amazing performance at an affordable running costs. With a fresh, stylish look in black, the SC-F6330 turns any office into a modern space. The SC-F7270 is designed for roll-based production, ideal for short to medium-volume roll-to-roll custom fabric, textile and soft signage. Developed with printing technology synonymous with Epson, both the SC-F6330 and SC-F7270 uses PrecisionCore™ TFP® printhead and UltraChrome DS ink in bigger ink pack capacities for increased productivity and higher quality printing of custom clothing, soft signage, merchandise and hard surface work.

1.5 L

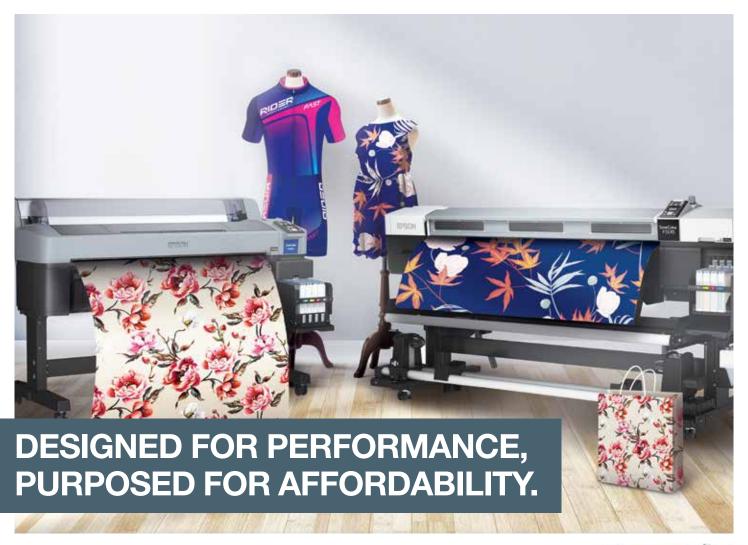

64" Wide







1 Year Warranty

Environmentally

4 COLOURS		DS	M
	SC-F6330	EPSON ULTRACHROME	
	SC-F7270	DYE SUB INK	

OURS		DS	MAXIMUM MEDIA WIDTH	MAX. II PER
4	SC-F6330	EPSON ULTRACHROME	44"	
	SC-F7270	DYE SUB INK	64"	

MAX SPEED PRODUCTION HIGH QUALITY RIP 8.3 INCLUDED



SC-F6330 44" Wide Dye-Sub



SC-F6330 High capacity 1.1L ink packs



SC-F7270 High capacity 1L ink packs



SC-F7270 64" Wide Roll-to-Roll Dye-Sub



IT'S IN THE DETAILS.

With Epson UltraChrome™ ink, the SureColor SC-F6330/SC-F7270 delivers consistent, vibrant prints.

Remarkable Productivity

Deliver superior print quality, speed and reliability during continuous operation, with minimal downtime through Epson's advanced PrecisionCore printhead.

Affordable Prints with Peace of Mind

Cost-effective 1.1L/1L*** ink packs and new high-density black ink ensure lower ink usage and overall printing costs.

Consistent Vibrant Quality

UltraChrome DS ink is specially formulated to produce vibrant colours, intense blacks, sharp contours and smooth gradations.





Epson Edge Print

^{*}Up to 64" wide for F7270, 44" for SC-F6330

^{**}All speed is dependent on RIP used
***1L ink packs are for use with SC-F7270 and 1.1L ink packs are for use with SC-F6330



1,013 mm

	er		SC-F6330	SC-F7270	Dimensions & Weight	
Printer Width			44"	64"	SC-F6330	
Printing Techi	nology				Weight: 94kg (without i	nk)
Print Method			PrecisionCore™ TFP® Printhead		_	
lozzle Configu	uration		360 nozzles x 4 channels x 1 head	360 x 2 nozzles each colour (x4)		way for
Maximum Reso	olution		720 x 1440 dpi			
rint Modes	Resolution	Pass	Print Speed (m²/h)			1,128 mr
Draft	360 x 720	1	63.4	58.9		7.
ligh Speed	720 x 720	2	30.4	30.3		
roduction	720 x 720	3	22.7	22.2	.	
Production	720 x 720	4	15.8	16.2	1,608 mm	→ ✓ 914 mm
ligh Quality	720 x 720	6	11.2	11.1	_	
ligh Quality	720 x 1440	8	8.3	8.2	Ink Pack Compatibility	/
nk System					1.1L Ink Packs	
nk Type			Epson UltraChrome™ DS dye-sublimation ink		 High Density Black 	C13T46H800
olours			4 colours - Cyan, Magenta, Yellow, High-Density	Black	Oyan	C13T46H200
nk Tank Capac	citv		1.5L		 Magenta 	C13T46H300
nk Pack Capac	-		1.1L	1L	Yellow	C13T46H400
aper Handlir					_	
aper Feed Me	_		Rear roll feed (2" / 3" core with max 150mm	Rear roll feed (2" / 3" core with max 250mm	SC-F7270	
aper i cea ivic	Striod		diameter); Auto take-up reel support over		Weight: 274kg (without	ink)
			, , , , , , , , , , , , , , , , , , , ,	diameter); Auto take-up reel unit		
Media Width			914.4 mm (36")	300 to 1625.6mm		
	(Margin)		300.0 mm (11.8") to 1117.6 mm (44")			A STATE OF THE PARTY OF THE PAR
Printing Width ((iviargiri)		Max. 1112mm Side Margin: 3mm both sides	Max. 1615.6mm	E	1
			Side Margin: 3mm both sides	Side Margin: 5mm both sides		
				(10mm when using Media Holding Plates)		
Media Thicknes	SS		Up to 1mm	0.08 - 1mm		
			(over 75gsm)	(over 75gsm)	0 600 mm	1,013
leat Press Co					2,620 mm	
ransfer Condi	ition		Heater			
emperature			200℃		Ink Pack Compatibility	<i>'</i>
ïme			40 sec		1L Ink Packs	
Sandwal Danal	ı				 High Density Black 	C13T741X00
Control Panel	-					
			2.7 inch colour LCD	2.5 inch colour LCD	Oyan Cyan	C13T741200
Colour & Size			2.7 inch colour LCD	2.5 inch colour LCD	CyanMagenta	C13T741200 C13T741300
Colour & Size			2.7 inch colour LCD Hi-Speed USB, 100BASE-TX /1000BASE-T	2.5 inch colour LCD		
Colour & Size Connectivity Standard				2.5 inch colour LCD	Magenta	C13T741300
Colour & Size Connectivity Standard Ethernet			Hi-Speed USB, 100BASE-TX /1000BASE-T	2.5 inch colour LCD	Magenta Yellow	C13T741300 C13T741400
Colour & Size Connectivity Standard Ethernet Memory			Hi-Speed USB, 100BASE-TX /1000BASE-T	2.5 inch colour LCD	Magenta	C13T741300 C13T741400
Control Panel Colour & Size Connectivity Standard Ethernet Memory Main			Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T	2.5 inch colour LCD	Magenta Yellow OEKO- CONFIDENCE I	C13T741300 C13T741400
Colour & Size Connectivity Standard Ethernet Memory Main Metwork			Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB	2.5 inch colour LCD P Remote Panel 2, EpsonNet Setup, EpsonNet Config,	Magenta Yellow OEKO- CONFIDENCE I ECO PASS	C13T741300 C13T741400 TEX ® N TEXTILES SPORT ③
Colour & Size Connectivity Standard Ethernet Memory Main Metwork			Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF		Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 1603	C13T741300 C13T741400 TEX ® N TEXTILES SPORT 3 Nissenken
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa	are		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB		Magenta Yellow OEKO- CONFIDENCE I ECO PASS	C13T741300 C13T741400 TEX ® N TEXTILES SPORT B Nissenken ed and verified.
Colour & Size Connectivity Standard Standard Memory Main Aletwork Printer Softwa	are		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP		Magenta Yellow OEKO- CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste	C13T741300 C13T741400 TEX ® N TEXTILES SPORT B Nissenken ed and verified.
Colour & Size Connectivity Standard Sthernet Memory Main Jetwork Printer Softwa Selectrical Spetated Voltage	are		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V		Magenta Yellow OEKO CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co	C13T741300 C13T741400 TEX ® N TEXTILES SPORT B Nissenken ed and verified. m/ecopassport
colour & Size connectivity standard thernet femory fain letwork rinter Softwa lectrical Spe lated Voltage lated Frequency	are		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz	P Remote Panel 2, EpsonNet Setup, EpsonNet Config,	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SI Nissenken at All Rights in in part or in whole,
colour & Size Connectivity Standard Sthernet Memory Main Letwork Printer Softwa Rated Voltage Rated Frequency Nower Supply	are ecifications		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V		Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SI Nissenken at All Rights in in part or in whole,
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Rated Voltage Rated Frequency Power Supply Power Consum	are ecifications		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SI Nissenken at All Rights in in part or in whole,
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Rated Voltage Rated Frequency Power Supply Power Consum Operating	are ecifications		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y	C13T741300 C13T741400 TEX ® N TEXTILES SPORT 30 Nissenken ed and verified. ed // recopassport e Pte Ltd. All Rights in in part or in whole, nission from Epson, OUR VISION are
colour & Size Connectivity Standard Sthernet Memory Main Selectrical Spe Rated Voltage Rated Frequency Power Supply Power Consum Operating Standby	are ecifications		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of	C13T741300 C13T741400 TEX ® N TEXTILES SPORT 30 Nissenken ed and verified. ed // recopassport e Pte Ltd. All Rights in in part or in whole, nission from Epson, OUR VISION are
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Rated Voltage Rated Frequency Power Supply Power Consum Operating Standby Sleep	are ecifications acy apption		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y	C13T741300 C13T741400 TEX ® N TEXTILES SPORT 30 Nissenken ed and verified. m/ecopassport e Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Rated Voltage Rated Frequency Power Supply Power Consum Operating Standby Sleep Power Off	are ecifications acy aption		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names	C13T741300 C13T741400 TEX ® N TEXTILES SPORT B Nissenken ed and verified. m/ecopassport e Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are of Seiko Epson
colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Bated Voltage Bated Voltage Bated Frequency Ower Consum Operating Standby Sleep Power Off Becommende	are ecifications acy aption		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are	C13T741300 C13T741400 TEX ® N TEXTILES B NISSENKEN do and verified. m/ecopassport Pe Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are of Seiko Epson a and other company for identification
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Bated Voltage Bated Voltage Bated Frequen Ower Supply Ower Consum Operating Standby Sleep Power Off Becommende Gemperature i	are ecifications notion feed Operating & Humidity		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SI Nissenken at and verified. In part or in whole, nission from Epson, OUR VISION are of Seiko Epson and other company for identification the trademarks or
colour & Size connectivity standard sthernet Memory Main letwork Printer Softwa clectrical Spe Bated Voltage Bated Voltage Bated Frequency Operating Standby Sleep Power Off Becommende Gemperature is Bundled Items	are ecifications noty nption feed Operating & Humidity is		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation)	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written perm is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are to	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SI Nissenken de And verified. m/ecopassport e Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are of Seiko Epson s and other company for identification the trademarks or
colour & Size connectivity standard sthernet flemory flain letwork frinter Softwa rinter Softwa rint	are ecifications noty nption feed Operating & Humidity is		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are t registered trademarks of owners.	C13T741300 C13T741400 TEX ® N TEXTILES SPORT S Nissenken B Nissenken om/ecopassport e Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are of Seiko Epson s and other company for identification the trademarks or of their respective
colour & Size connectivity standard sthernet flemory flain letwork frinter Softwa rinter Softwa rint	are ecifications noty nption feed Operating & Humidity is		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation)	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are to registered trademarks of owners. Epson disclaims any an marks. Print samples st	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SPORT SPORT SPORT And A STILES SPORT AND A
colour & Size connectivity standard thernet flemory flain letwork frinter Softwa rinter Softwa rinte	are ecifications noty nption feed Operating & Humidity is stem Bottle Kit		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation)	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W	Magenta Yellow OEKO- CONFIDENCE I ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are t registered trademarks of owners. Epson disclaims any an marks. Print samples s's simulations. The actual	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson The sand other company for identification the trademarks or of their respective In all rights in those nown herein are product design and
colour & Size connectivity standard thernet flemory flain letwork frinter Softwa rinter Softwa rinte	are ecifications acy application feed Operating & Humidity is stem Bottle Kit port System		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation)	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Tests www.oeko-tex.co @2019 Epson Singapor Reserved. Reproduction without the written perm is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks of owners. Epson disclaims any an marks. Print samples strimulations. The actual contents may vary. Spe	C13T741300 C13T741400 TEX ® N TEXTILES FOORT S Nissenken and and verified. m/ecopassport e Pte Ltd. All Rights n in part or in whole, nission from Epson, OUR VISION are of Seiko Epson s and other company for identification the trademarks or of their respective d all rights in those nown herein are product design and cifications are subjections are subjective
colour & Size connectivity tandard thernet lemory lain etwork rinter Softwa lectrical Spe ated Voltage ated Frequencower Supply ower Consum Operating Standby Sleep Power Off ecommende emperature is undled Items ik Supply System d Waste Ink ubstrate Suppled Ink Supply	are ecifications acy application feed Operating & Humidity is stem Bottle Kit port System / System		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation)	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CORFIDENCE CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Pleater to the production of the period o	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size connectivity tandard thernet lemory lain etwork rinter Softwa lectrical Spe ated Voltage ated Frequencower Supply ower Consum Operating Standby Sleep Power Off ecommende emperature is undled Items ik Supply System d Waste Ink ubstrate Suppl and Ink Supply itial Ink Pack	are ecifications acy application feed Operating & Humidity is stem Bottle Kit port System / System		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CORFIDENCE I CONFIDENCE I CONFIDENCE I CONFIDENCE I CONFIDENCE I CONFIDENCE I CONFIDENCE I NEP 160: Textile chemicals. Tests www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are to registered trademarks of owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notice.	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size connectivity tandard thernet lemory lain letwork rinter Softwa rinter Softwa lectrical Spe lated Voltage lated Frequency ower Consum Operating Standby Sleep Power Off lecommende lemperature is sundled Items lak Supply System Ind Waste Ink ubstrate Supp Ind Ink Supply littal Ink Pack soll Adaptor	are ecifications acy application feed Operating & Humidity is stem Bottle Kit port System / System		Hi-Speed USB, 100BASE-TX / 1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491 - C12C934741	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CORFIDENCE CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Pleater to the production of the period o	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size connectivity standard sthernet Memory Main letwork Printer Softwa Printer Softwa Rectrical Spe Rated Voltage Rated Voltage Rated Frequent Ower Supply Power Consum Operating Standby Sleep Power Off Recommende Remperature is Bundled Item Ink Supply Syst Ind Waste Ink Substrate Supp Ind Ink Supply Ind Ink Supply Ind Ink Supply Ind Ink Pack Roll Adaptor Optional	are accifications accy application feed Operating & Humidity is steem Bottle Kit port System / System Set		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CORFIDENCE CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Pleater to the production of the period o	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size connectivity tandard thernet lemory lain letwork rinter Softwa rinter Softwa lectrical Spe lated Voltage lated Frequency ower Consum Operating Standby Sleep Power Off lecommende lemperature is sundled Items lak Supply Sysi and Waste Ink ubstrate Supp and Ink Supply ititial Ink Pack soll Adaptor leptional uto Cutter Bla	are acifications acy applications acy acy acy acy acy acy acy ac		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Plet Epson offices for more	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size connectivity tandard thernet lemory lain letwork rinter Softwa rinter Softwa lectrical Spe lated Voltage lated Frequency ower Supply ower Consum Operating Standby Sleep Power Off lecommende lemperature is sundled Items lak Supply Sysi and Waste Ink ubstrate Supp and Ink Supply ititial Ink Pack soil Adaptor leptional uto Cutter Bia fledia Holding	are acifications acy applications acy applications acy applications acy applications acy applications acy acy acy acy acy acy acy ac		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Plet Epson offices for more	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson The sand other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subjete e and may vary ase check with local
colour & Size connectivity chandard thernet demory dain letwork rinter Softwa rinter Softwa letwork letw	are acifications Incy Inption If acid Operating & Humidity Is Bottle Kit port System / System Set Adde Plate Git		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Plet Epson offices for more	C13T741300 C13T741400 TEX ® N TEXTILES SPORT SPORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson The sand other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subjete e and may vary ase check with local
Colour & Size Connectivity Standard Ethernet Memory Main Network Printer Softwa Electrical Spe Rated Voltage Rated Voltage Rated Voltage Rated Frequen Operating Standby Sleep Power Consum Operating Standby Sleep Recommende Remperature is Bundled Item Isk Supply Syst and Waste Ink Substrate Supply Ind Ink Supply Ind Ink Pack is Roll Adaptor Optional Ruto Cutter Bla Media Holding Maintenance K Vaste Ink Bottl	are polifications Incy Inption Incy Inption Incy Inption Incy Inption Incy Input System Incy Incy Input System Incy Incy Incy Incy Incy Incy Incy Incy		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491 C12C934701 Order Code C13S902006 C13S210042 C13T724000	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Plet Epson offices for more	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT And and verified. In/ecopassport The Pte Ltd. All Rights in part or in whole, nission from Epson, OUR VISION are of Seiko Epson The sand other company for identification the trademarks or of their respective In all rights in those nown herein are product design and cifications are subject e and may vary ase check with local
colour & Size Connectivity Standard Sthernet Memory Main Letwork Printer Softwa Stated Voltage Stated Voltage Stated Voltage Standby Sower Consum Operating Standby Sleep Power Off Recommende Standled Item Substrate Supply Solid Waste Ink Substrate Supply Stand Ink Supply Signal Maste Ink Substrate Supply Stand Ink Supply Solid Adaptor Optional Standled Indig Media Holding Maintenance K	are polifications are polifications polifications polifications polifications feed Operating & Humidity is setem Bottle Kit port System V System V System Set ade Plate Kit le apter		Hi-Speed USB, 100BASE-TX /1000BASE-T 10BASE-T / 100BASE-TX / 1000BASE-T 512MB 128MB Communication Driver, User's Guide, EPSON LF EpsonNet Pvrint, Wasatch SoftRIP AC 100 – 240V 50 – 60Hz 1.0 - 0.5A Approx. 65W Approx. 20W Approx. 3W Less than 0.4W 15 - 35°C; 20 - 80% RH (non-condensation) C12C932491	P Remote Panel 2, EpsonNet Setup, EpsonNet Config, 10 - 5A Approx. 460W Approx. 30W w/ heater OFF Approx. 10W Less than 0.6W	Magenta Yellow CONFIDENCE ECO PASS NEP 160: Textile chemicals. Teste www.oeko-tex.co ©2019 Epson Singapor Reserved. Reproduction without the written pern is strictly prohibited. EPSON and EXCEED Y registered trademarks of Corporation. All other product names names used herein are purposes only and are tregistered trademarks owners. Epson disclaims any an marks. Print samples st simulations. The actual contents may vary. Spe to change without notic between countries. Plet Epson offices for more	C13T741300 C13T741400 TEX ® N TEXTILES FORT SPORT SPORT SPORT And and verified. In/ecopassport Pe Pte Ltd. All Rights In in part or in whole, Inission from Epson, OUR VISION are of Seiko Epson Se and other company for identification the trademarks or of their respective In all rights in those town herein are product design and cifications are subject e and may vary ase check with local

Check for your warranty terms at www.epson.com.my/warrantytnc

